

TIMELESS, CONCEPTUAL AND FUNCTIONAL DESIGN.

THE VERSATILITY, ROBUSTNESS AND EASE WITH WHICH THE BATH CAN FIT INTO ANY STYLE OF BATHROOM ARE THE STRONG POINTS OF THIS MODEL.

ALSO AVAILABLE ON LOW VOLUME SERIES: THE LOW TUB DEPTH ENABLES COMFORTABLE AND SAFER ENTRANCE AS WELL AS WATER SAVING.

## ACCESSORIES

Chromed handles, Enamel or Embossed Anti-slip, Tap holes, Sound insulating set.

## INSTALLATION AIDS

Metal feet, Waste valve, Taps, Bathtub furniture, Vitreous enamel steel panelling system and Shower screen.

## AVAILABLE SIZES

|               |               |
|---------------|---------------|
| 1700 x 750 mm | 1700 x 700 mm |
| 1600 x 750 mm | 1600 x 700 mm |
| 1500 x 750 mm | 1500 x 700 mm |
|               | 1400 x 700 mm |
|               | 1200 x 700 mm |
|               | 1000 x 700 mm |



## Low volume series:

1700 x 700 x 320 mm  
1600 x 700 x 320 mm  
1500 x 700 x 320 mm  
1400 x 700 x 320 mm

## AVAILABLE COLOURS


White and other sanitary colours.

## REMARKS

5 years warranty,  
100% recyclable,  
Heavy duty performances:  
Resistant to surface impacts, scratch, abrasion, colourfast and lightfast.  
Proven resistance to chemical and staining agents according to ISO 28706-1, ISO 28706-2 and EN 14516.

## STANDARDS

CE mark according to EN 14516-CL1+CL2,  
Certified with Environdec.com,  
Environmental Product Declaration according to ISO 14025.

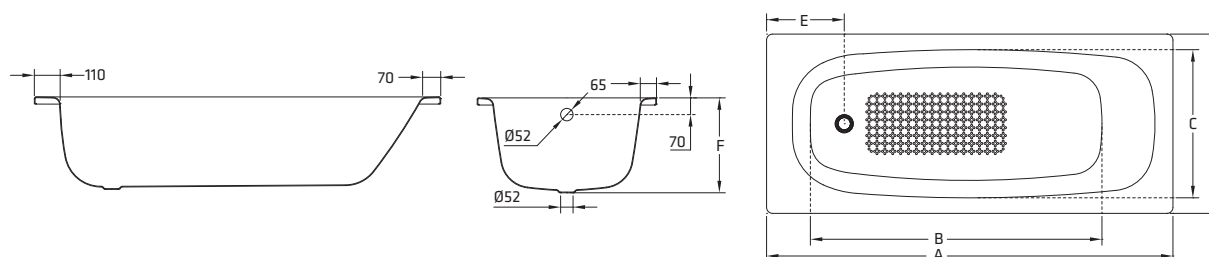

| Ref.   | A    | B    | C   | D   | E   | F   | Vol.  |
|--------|------|------|-----|-----|-----|-----|-------|
| B75C   | 1700 | 1260 | 620 | 750 | 330 | 390 | ≈110* |
| B65C   | 1600 | 1160 | 640 | 750 | 330 | 390 | ≈100* |
| B55C   | 1500 | 1060 | 575 | 750 | 310 | 390 | ≈90*  |
| B45C   | 1400 | 1000 | 575 | 750 | 310 | 390 | ≈80*  |
| B70C   | 1700 | 1260 | 575 | 700 | 310 | 390 | ≈110* |
| B60C   | 1600 | 1160 | 575 | 700 | 310 | 390 | ≈100* |
| B50C   | 1500 | 1060 | 575 | 700 | 310 | 390 | ≈90*  |
| B40C   | 1400 | 1000 | 575 | 700 | 310 | 390 | ≈80*  |
| B20C   | 1200 | 825  | 575 | 700 | 290 | 415 | ≈80*  |
| B10C   | 1000 | 800  | 575 | 700 | 275 | 370 | ≈35*  |
| Δ B7LC | 1700 | 1350 | 575 | 700 | 310 | 320 | ≈55*  |
| Δ B6LC | 1600 | 1250 | 575 | 700 | 310 | 320 | ≈45*  |
| Δ B5LC | 1500 | 1150 | 575 | 700 | 310 | 320 | ≈35*  |
| Δ B4LC | 1400 | 1050 | 575 | 700 | 310 | 320 | ≈30*  |

\* 70 litres displacement on average.